

CU 7060 4P / 2x4P F8

Data cable, S/FTP, Category 6_A, AWG23, Euroclass D_{ca}



- 1 Inner conductor:** AWG23 Bare copper wire
- 2 PE insulated conductor:** 1.3 mm Ø
- 3 Screen (pair):** Alu PETP foil
- 4 Overall screen:** Tinned braided copper
- 5 Outer sheath:** FRNC/LS0H orange RAL 2003



DESCRIPTION

Electrically and mechanically superior quality Cat.6A data cable - exceeds the requirements of ISO/IEC 11801, IEC 61156-5, EN 50173-1 and prEN 50288-10-1.

Excellent shielding effect due to individually screened pairs and overall copper braid.

Compatible with all current connecting hardware in accordance with EN 50173 and ISO/IEC 11801.

APPLICATION

Data cable for structured premises cabling.

For the transmission of digital and analogue voice, video and data signals.

Suitable for all ICT network applications up to class EA applications (500 MHz) in accordance with EN 50173-1 and ISO/IEC 11801.

Applicable for Power over Ethernet (PoE) / PoE+.

ELECTRICAL CHARACTERISTICS

Category	1	4	10	5e	6	6 _A	600
Frequency [MHz]	1	4	10	100	250	500	600
Attenuation [dB/100m]	2.1	3.8	5.9	19.1	30	43	47
NEXT [dB]	93	93	93	93	82	77	75
PS NEXT [dB]	90	90	90	90	79	74	72
ACR-N [dB]	91	89	87	73	52	34	28
PS-ACR-N [dB]	88	86	84	70	49	31	25
ACR-F [dB]	96	96	96	74	61	43	39
PS-ACR-F [dB]	93	93	93	71	58	40	36
Return loss [dB]	26	28	30	30	27	25	24


These performance data are typical measured values.

CU 7060 4P / 2x4P F8

Data cable, S/FTP, Category 6_A, AWG23, Euroclass D_{ca}



ELECTRICAL PROPERTIES

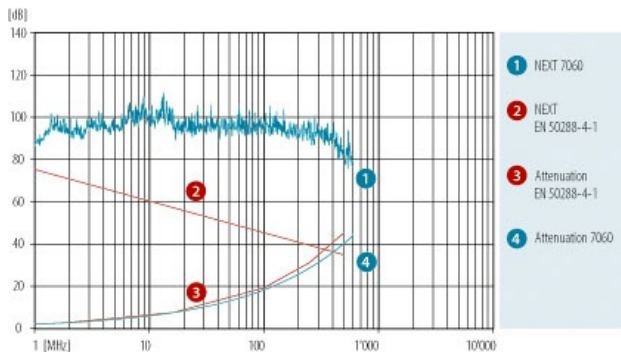

Loop resistance at 20° C:	146 Ω/km
Mutual capacitance:	42 pF/m
Impedance at 100 MHz:	100 Ω ±5 Ω
Transfer impedance at 1/10/30 MHz:	< 6/10/20 mΩ/m
Coupling attenuation (limit curve of critical state - IEC 61156):	> 75 dB
Near end unbalance attenuation LCL at 1-600 MHz :	> 40 dB
Delay Skew:	4 ns/100 m
NVP:	80 %

MECHANICAL PROPERTIES

		CU 7060 4P	CU 7060 2x4P F8
Bending radius	during draw-in:	≥ 65 mm	≥ 65 mm
	permanently installed:	≥ 30 mm	≥ 30 mm
Tensile strength:		≤ 95 N	≥ 190 N
Crush resistance:		≥ 1000 N/10 cm	
Impact:		≥ 10 impacts	
Temperature range	during installation:	0° C to + 50° C	
	in operation:	-20° C to + 60° C	

STANDARDS

Wire colour	white/blue white/orange white/green white/brown in accordance with IEC 60189 and IEC 60708
Imprint	DATWYLER «cable type» «additional text» «batch number» «meter marks»
Zero halogen, no corrosive gases	IEC 60754-1/-2, EN 60754-1/-2, VDE 0482-754-1/-2, AREI-RGIE Art.104-SA
Flame propagation	IEC 60332-1-2, EN 60332-1-2, VDE 0482-332-1-2, AREI-RGIE Art.104-F1
Flame spread	IEC 60332-3-24, EN 60332-3-24, AREI-RGIE Art.104-F2
Smoke density	IEC 61034-1/-2, EN 61034-1/-2, VDE 0482-1034-1/-2, AREI-RGIE Art.104-SD
Reaction to fire (Euroclasses)	EN 13501-6: D _{ca} -s2,d1,a1
PoE	IEEE 802.3at
EMC	shielded
Segregation class	c
Cat./Class	Cat 6 _A / Class E _A - limit values as specified by IEC 61156-5 and EN 50288-10-1 guaranteed

VERSIONS

Article Number	DoP	Product	Sheath	Sheath Ø [mm]	Sheath colour	Weight [kg/km]	Cu rate [kg/km]	Fire load [MJ/m]	Fire load [kWh/m]	Dimensions n x p x [mm (AWG)]	PU
182924		CU 7060 4P	FRNC/LS0H	7.1	orange	55.0	26.4	0.55	0.152	4 x 2 x 0.55	1000 m

CU 7060 4P / 2x4P F8

Data cable, S/FTP, Category 6_A, AWG23, Euroclass D_{ca}



									(AWG23)	drum
18292400DK		CU 7060 4P	FRNC/LS0H 7.1	orange	55.0	26.4	0.55	0.15	4 x 2 x 0.55 (AWG23)	1000 m drum
18292400DL		CU 7060 4P	FRNC/LS0H 7.1	orange	55.0	26.4	0.55	0.15	4 x 2 x 0.55 (AWG23)	500 m drum
182927		CU 7060 2x4P F8	FRNC/LS0H 7.1 x 15	orange	110.0	52.8	1.10	0.304	2x (4 x 2 x 0.55 AWG23)	500 m drum
18292700DL		CU 7060 2x4P F8	FRNC/LS0H 7.1 x 15	orange	110.0	52.8	1.10	0.30	2x (4 x 2 x 0.55 AWG23)	500 m drum