


0.0 mm~6.0 mm	±0.08
6.0 mm~20.0 mm	±0.11
20.0 mm~50.0 mm	±0.15
50.0 mm~100.0 mm	±0.20
100.0 mm~250.0 mm	±0.30
250.0 mm~400.0 mm	±0.40
400.0 mm~600.0 mm	±0.50



#### Technical Requirements:

1. 8-way German-type output + overload protection + double-breaker switch
2. Module assemble sequence: overload protection + double-break switch + 8-way German-type socket
3. 1.5U Rackmount size for standard 19" cabinets & racks
4. Aluminum alloy shell
5. Cable specification: 3G1.5mm<sup>2</sup>; 3 meter cable
6. Bracket installation style: frontal
7. Relative humidity: 10 - 90%
8. Socket/outlet standard: IEC60884
9. Electrical rating: 250 V AC
10. Maximum load current: 16 A

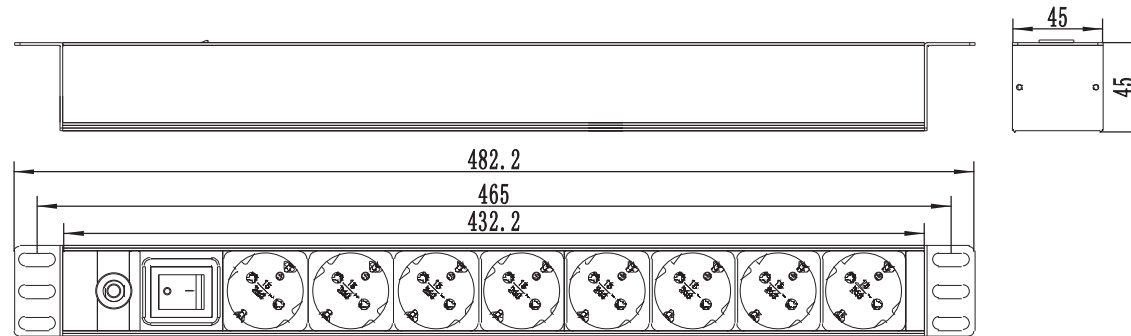

[intellinetnetwork.com](http://intellinetnetwork.com)