



VGA Cable, Male/Male

118810 | 118817 | 118811 | 118812 | 118813 | 118814
118815 | 118816 |

The equip[®] VGA Cable is constructed with sturdy knurled screws and ferrite beads to offer a reliable connection between the monitors or projectors and the VGA-interfaced equipments.

| Key Features

- HDB15 3+7 Cable, Male/Male Connector
- Built with knurled screws and ferrite beads
- Double Shielded

| Specification

	VGA 640x480	SVGA 800x600	XGA 1024x768	SXGA+ 1400x1050	UXGA 1600x1200	QXGA 2048x1536	WXGA 1280x720	WSXGA+ 1680x1050	WUXGA 1920x1200
118810	v	v	v	v	v	v	v	v	v
118817	v	v	v	v	v	v	v	v	v
118811	v	v	v	v	v	v	v	v	v
118812	v	v	v	v	-	-	v	-	-
118813	v	v	-	-	-	-	-	-	-
118814	v	v	-	-	-	-	-	-	-
118815	v	v	-	-	-	-	-	-	-
118816	v	v	-	-	-	-	-	-	-




www.equip-info.net

| Ordering Information

PN	EAN	Packing	Length
118810	4015867513897	Poly Bag	1.0m
118817	4015867176054	Poly Bag	1.8m
118811	4015867513903	Poly Bag	3.0m
118812	4015867513910	Poly Bag	5.0m
118813	4015867175552	Poly Bag	8.0m
118814	4015867175569	Poly Bag	10.0m
118815	4015867175576	Poly Bag	15.0m
118816	4015867175583	Poly Bag	20.0m




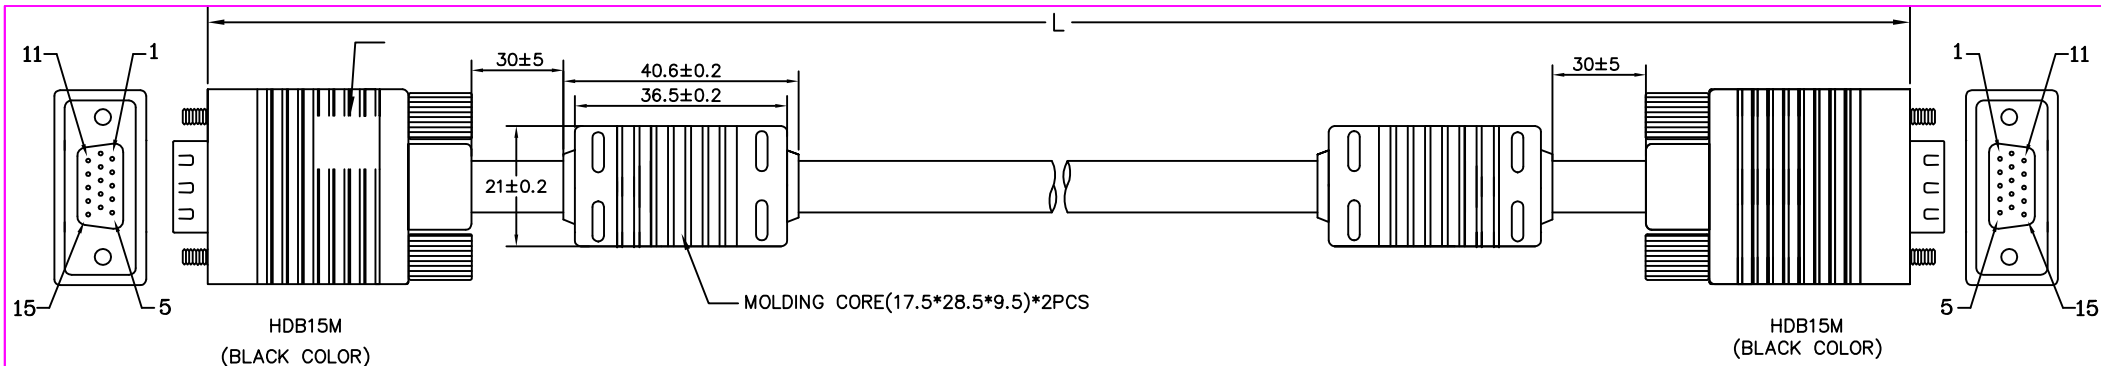


ITEM NO	COLOR	LENGTH	CABLE	LABEL	
118810	BLACK	1000±30mm	(32AWG*1C+B+AL)*3C+32AWG*7C,OD=6.0±0.2mm		
118811	BLACK	3000±60mm	(32AWG*1C+B+AL)*3C+32AWG*7C,OD=6.0±0.2mm		
118812	BLACK	5000±60mm	(30AWG*1C+B+AL)*3C+30AWG*7C,OD=7.0±0.2mm		
118814	BLACK	10000±100mm	(28AWG*1C+B+AL)*3C+28AWG*7C,OD=7.5±0.2mm	4015867175569	
118815	BLACK	15000±100mm	(26AWG*1C+B+AL)*3C+26AWG*7C,OD=8.5±0.2mm	4015867175576	
118816	BLACK	20000±200mm	(24AWG*1C+B+AL)*3C+24AWG*7C,OD=9.5±0.2mm	4015867175583	
118817	BLACK	1800±30mm	(32AWG*1C+B+AL)*3C+32AWG*7C,OD=6.0±0.2mm	4015867176054	

NOTE:


1. CABLE: 30AWG(7/0.10CCS),UL2919,AL+B-FOIL,(30AWG*1C+B+AL)*3COAX+30AWG*7C+EA,OD=X±0.2mm.BLACK COLOR,PVC JACKET.
2. LENGTH: L.
3. CONNECTORS: HDB15P*2PCS(BLACK INSULATION)(FULL PIN)(SHELL NICKEL).
4. SCREW : INCH SCREW*4PCS(BNC SCREW)(NICKEL),
5. CONTACTS:

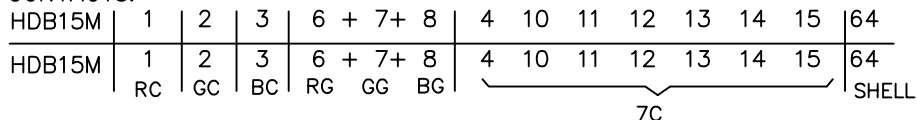

6. MOLD: ASS'Y IBM TYPE.
7. Test machine test condition.
 - A.100% OPEN,SHORT&INTERMITANCE TEST.
 - B.CONDUCTOR RESISTANCE: 3ohms MAX:
 - C.INSULATION RESISTANCE: 20M Min/,10ms:
8. ALL MUST BE RoHS COMPLIANT.

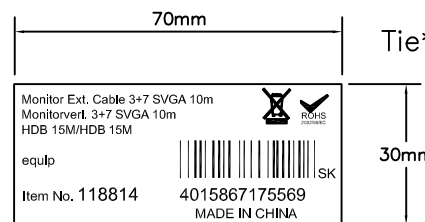

ITEM NO LABEL

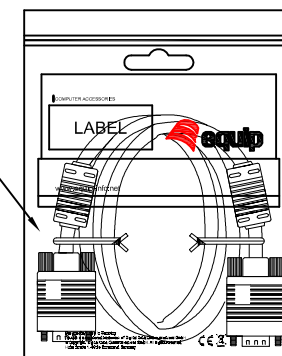

DDC ZIP BAG+LABEL
10PCS/PE BAG

COMPANY	DDC		ITEM NO.	118810	NO	B6421	Part Name	HDB15MM-IBM 3COA+7C	SCALE	NON
REVISION	DATE	DISCRIPTION	DRAWN BY	Yuwenming	SPEC				UNIT(mm)	
REV.A/3	2019.02.23	DD2019020053	DESIGNED BY	Chengrunming					PAGE	1/1
REV.A/4	2019.05.13	AF-FOIL	APPROVAL BY	Chenlianwei						
REV.A/2	2016.08.15									