


DATASHEET

RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 5m, blue

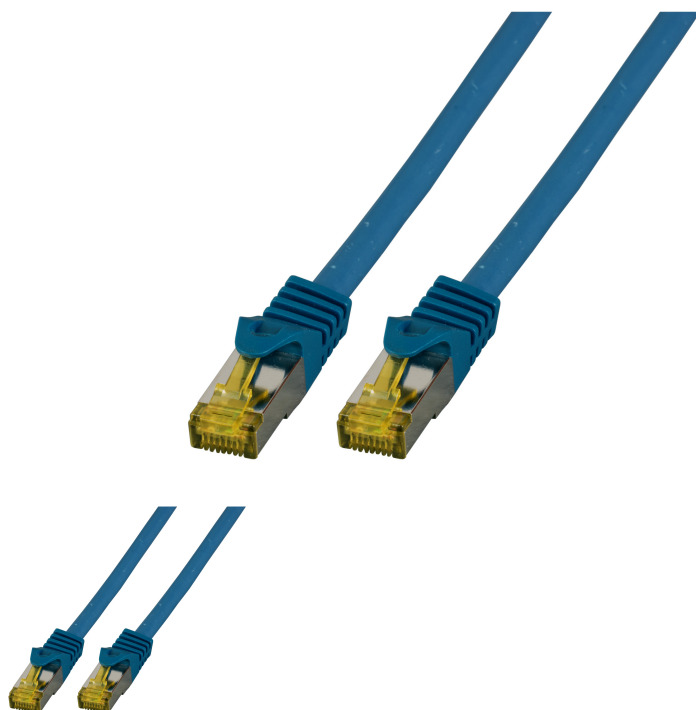

General data

The shielded Cat.6A RJ45 patch cable ensures excellent performance for 10 Gigabit Ethernet applications. The moulded grommet captivates with its **slim design** and thus simplifies the insertion process in cramped conditions.

Cross section 4 x 2 x AWG26 / 7

Moulded grommet, slim design

Length imprint on the boot

Allgemeine Daten

Colour anti-kink sleeve	blue
Suitable for degree of protection (IP)	IP20
Cable type	S/FTP
Pin assignment	1:1
Locking lever	True
Fire retardant version	True
Model	Shielded
Material outer sheath	LSZH
Connector type	RJ45 Standard yellow

This datasheet was created automatically on 22-09-2023 . Technical changes reserved.



DATASHEET

RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 5m, blue

Contacts	Gold plated
Allocation	acc. TIA/EIA 568B
Area of Application	Industrial Ethernet
Length imprint	True
Anti-kink sleeve	plugged in
Current Rating	max. 1 A
Colour outer sheath	blue
Halogen free	True
Category	6A (TIA)

Mechanische Eigenschaften

Conductive shield	Selected shield contact
Bending radius	>32.5 mm
Mating cycles	2000

Kabelaufbau

Raw cable	Cat.7
Type of connector connection 2	RJ45 8(8)
Type of connector connection 1	RJ45 8(8)
Conductor Material	Copper
AWG-size	26/7
Cable construction	4x2

Kabelmantel

Outer diameter of the cable	6.5 mm
Oil resistant (according to EN 60811-404)	False
Halogen-free	yes
Flame retardant	acc. IEC60332-1
Printing	Cat.7 raw cable S/FTP 4x2xAWG26/7 PIMF 600MHz ISO/IEC 11801 & EN50173-1 TIA/EIA 568B-2.1 Halogen Free ***10GIGABIT***
Silicone-free	True
Low smoke	acc. IEC61034

Umgebungsbedingungen

Temperature range	-20 - 60 °C
-------------------	-------------

This datasheet was created automatically on 22-09-2023 . Technical changes reserved.



DATASHEET

RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 5m, blue

Elektrische Eigenschaften	
Insulation Resistance	10 MΩ
Test voltage	1000 V DC, 1min
Loop resistance	292 Ω/km
Contact Resistance	30 mΩ
POE class	PoE+ acc. to IEEE802.3at
Operating-/ tempering voltage	max. 50 V DC
Impedance	100 ±5 Ω
Resistance unbalance	5 %
Conductor resistance DC	146 Ω/km

Übertragungstechnische Eigenschaften	
Transmission	10Gbit
Bandwidth	500MHz

Normen, Zulassungen, Zertifizierungen	
Oil resistant (acc. EN 60811-2-1)	False
Connector	IEC 60603-7-51

Available variants		
ArtNr.	Bezeichnung	Length Längentoleranz
MK7001.0,15BL	RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 0,15m, blue	0.15 m ±5 %
MK7001.0,25BL	RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 0,25m, blue	0.25 m ±5 %
MK7001.0,5BL	RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 0,5m, blue	0.5 m ±5 %
MK7001.1BL	RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 1m, blue	1.0 m ±5 %
MK7001.1,5BL	RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 1,5m, blue	1.5 m ±5 %
MK7001.2BL	RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 2m, blue	2.0 m ±5 %
MK7001.3BL	RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 3m, blue	3.0 m ±5 %
MK7001.5BL	RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 5m, blue	5.0 m ±5 %
MK7001.7,5BL	RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 7,5m, blue	7.5 m ±5 %
MK7001.10BL	RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 10m, blue	10.0 m ±5 %
MK7001.15BL	RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 15m, blue	15.0 m ±5 %
MK7001.20BL	RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 20m, blue	20.0 m ±5 %
MK7001.25BL	RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 25m, blue	25.0 m ±5 %
MK7001.30BL	RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 30m, blue	30.0 m ±5 %


This datasheet was created automatically on 22-09-2023 . Technical changes reserved.



DATASHEET

RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 5m, blue

Drawings

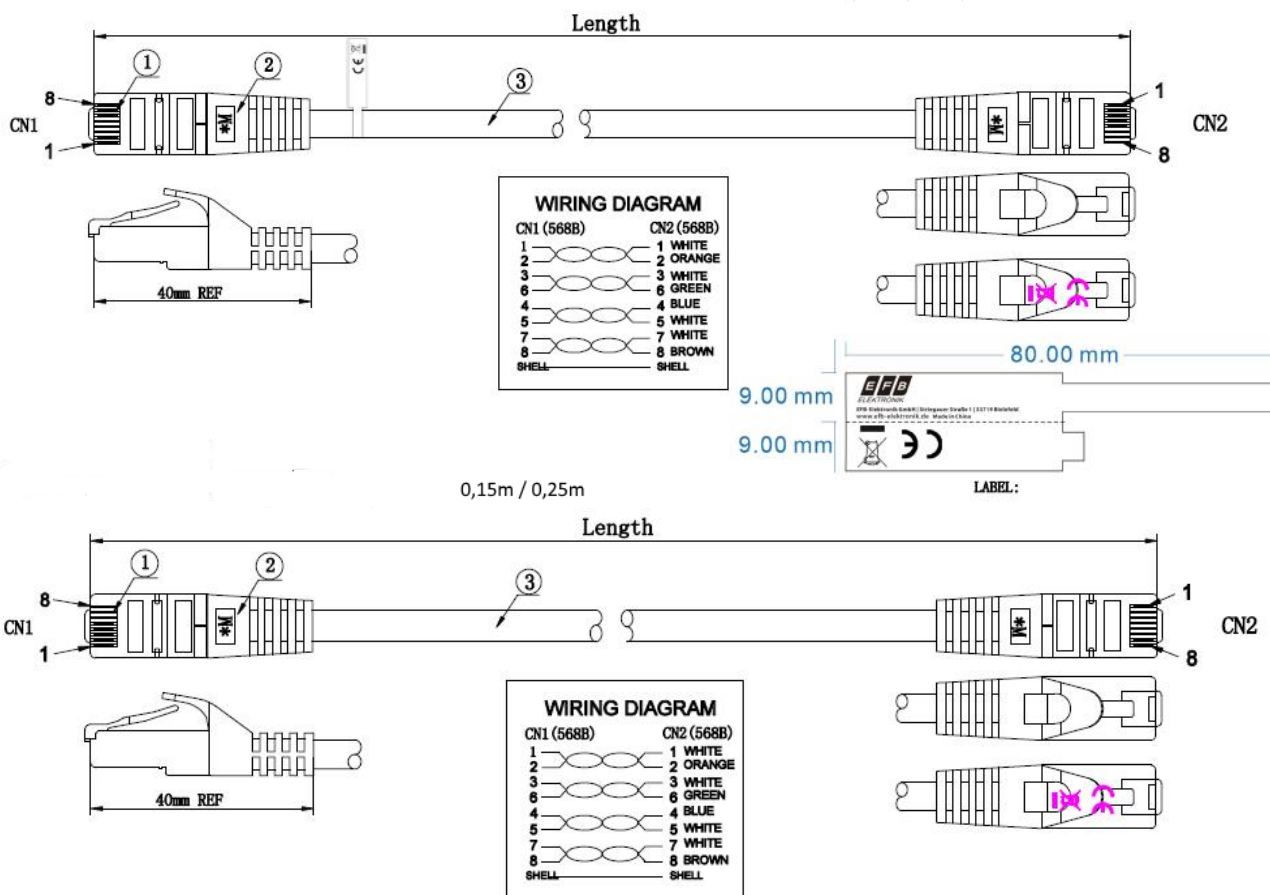

This datasheet was created automatically on 22-09-2023 . Technical changes reserved.

