


ELIKA PRO 700 C

UHF Aerials

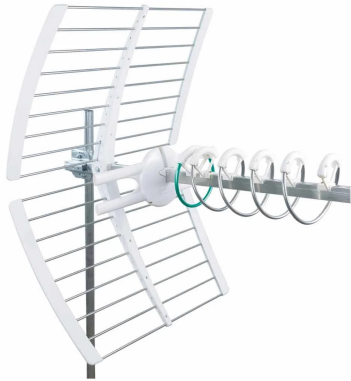

Active helical UHF band aerial complete with F connector and an LED monitoring system and an automatic gain control (AGC).

Technical Chars

- **Facilitated monitoring system via a signalling LED and automatic gain control (CAG)**
- Pre-assembled directors, radiator and reflectors with quick-connection on a slide already present on the cradle; **assembly** is completed **without** the need for any **tools**.
- Special attention was paid to the choice of materials to achieve higher **robustness**.
- High gain and **extraordinary directivity with almost no side lobes**.
- Innovative pole mount with zenith adjustment as standard and knurled surface for optimum strength and hold to the pole, and **large butterfly nut for tightening without the need for any tools**.
- An **LTE filter** has been inserted into the dipole radiator to guarantee the quality of the distributed signal and achieve excellent filtering of **5G and 4G interfering** signals in the LTE band (694-860 MHz) reserved for mobile telephony.
- Exclusive **Elika design patented** by Fracarro.

ELIKA PRO 700 C		
Code		213231
Elements		1
Band		UHF
Channel		E21-E48
Bandwidth	MHz	470-694
Gain	dBi	47
AGC	dBμV	65-80
Output level	dBμV	98
Power supply voltage	V	12-24
Absorption	mA	45 @12V
Front/Back ratio	dB	32
Return loss	dB	-15
Beam width (3dB)	°	±22
Wind load 120Km/h 729N/m ²	Kg (N)	19 (186.3)
Connector		F
Impedence	Ohm	75
Max mast diameter	mm	60

Dimensions	cm	92 x 82 x 62
Accessories		
Horizontal polarisation		Included
Horizontal polarisation tilt adjustment		Included
Vertical polarisation		Included
Vertical polarisation tilt adjustment		Included
Auxiliary boom		-
Dimensions and packaging		
Packing		Single in carton
Pieces		6
EAN code		8016978101061
Multiple EAN		8016978101825
Packaging dimensions	mm	1020 x 750 x 470
Packaging weight	Kg	21.4
Unit weight	Kg	2.30
Total weight	Kg	18

Gain (x: MHz frequency, y: ISO dBi gain) and Polar diagram (@600MHz)

