



**Datenblatt - Fiche technique - Data sheet**  
**S3691 ~ S3693**




**DisplayPort Kabel, DP ST – ST**

**Câble DisplayPort, DP M – DP M**

**DisplayPort Cable, DP M – DP M**



REV	DESCRIPTION
^	

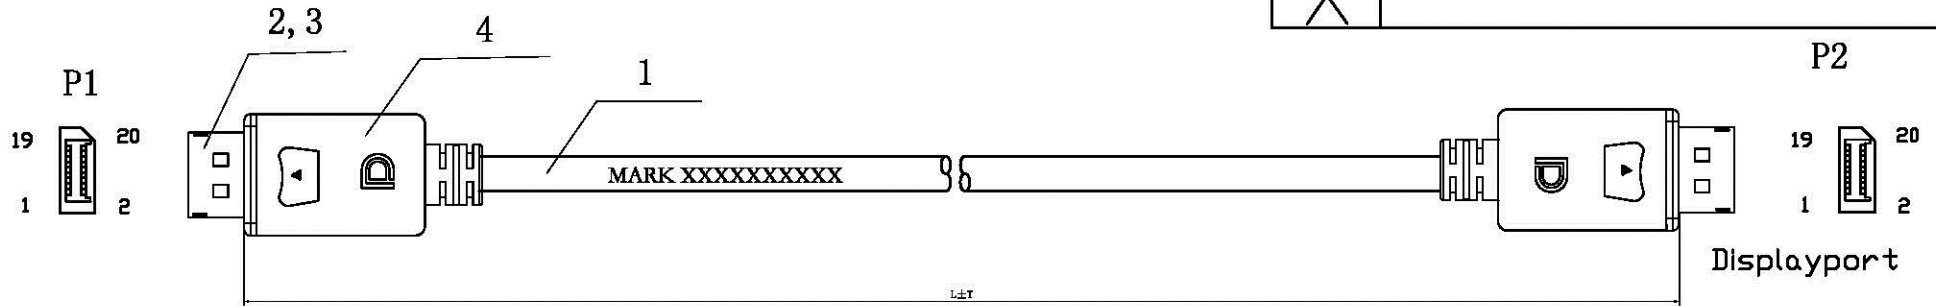


Product family	
L=1.5m	T=1.5cm
L=2m	T=2cm
L=3m	T=3cm
L=5m	T=5cm
L=8m	T=6cm
L=10m	T=8cm

S3691  
S3692  
S3693

### PIN OUT

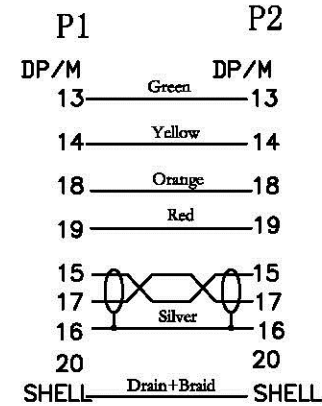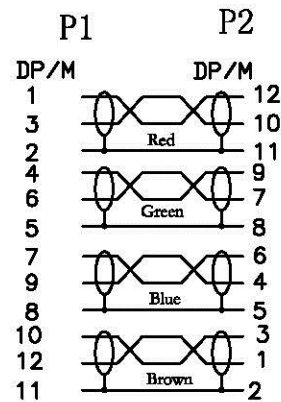

### CABLE STRUCTURE

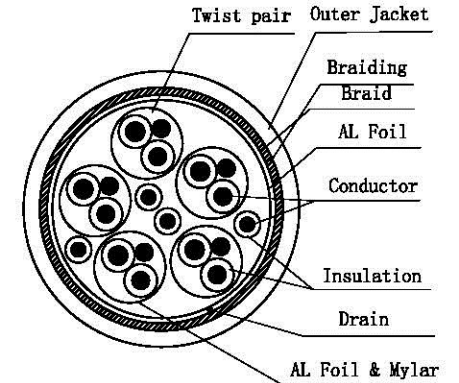

### NOTE

- Electrical test:
  - 100% open short and miss wire test;
  - 100% 1080P test via source and sink;
  - Insulation resistance: DC300V/5s 15Mohm min;
  - Contact resistance: 2.5ohm Max;
  - Dielectric strength: 150V AC/minute, 1mA.
- Full RoHS compliant

NO.	PART NO.	PART NAME	MATERIAL	Q'TY	REMARKS
4		MOLDING	PVC	2	BLACK
3		DUST COVER	LDPE	2	TRANSPARENCE
2		CONN.	DP/M Assembled type , with locking	2	PLATED NI
1		CABLE	(1/0.254BC+PPE)*1P+1/0.254BC+AL)*5C+ (1/0.254BC+PPE)*4C+AL+1/0.254BC+80/0.12ALMG+PVC OD6.5MM	1	BLACK

<b>rotronic</b>		DESCRIPTION		DP CABLE 30# DP/M-DP/M			
		PRODUCT NO.		S3691~S3693			
DRAW	YUAN	CONSUMER					
CHECK		DATE		2011/11/03	REV.	A/1.2	
APP.		SHEET	1/1	UNIT	mm	SCALE	