


## ALPHA 5HD 700

### UHF Aerials

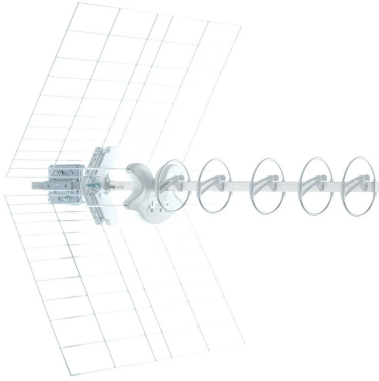

UHF 5-element loop Yagi antenna with F-connector, 5G and 4G LTE filter and grid reflector

### Technical Chars

- Pre-assembled directors, radiator and reflectors snap onto a slide already present on the cradle; **assembly** is completed **without** the need for any **tools**.
- Special attention was paid to the choice of materials to achieve higher **robustness**.
- High gain, excellent impedance matching and **excellent directivity**.
- Innovative pole mount with zenith adjustment as standard and a knurled surface for optimum strength and hold to the pole, and a **butterfly nut** for **tightening without the need for any tools**.
- A **5G filter** has been inserted into the dipole radiator to guarantee the quality of the distributed signal and achieve excellent filtering of **5G and 4G interfering** signals in the LTE band (694-860 MHz) reserved for mobile telephony.
- Exclusive design **patented by Fracarro**.

ALPHA 5HD 700		
Code		213240
Elements	n°	5
Band		UHF
Channel		E21-E48
Bandwidth	MHz	470-694
Gain	dBi	13.5
Front/Back ratio	dB	38
Return loss	dB	-18
Beam width (3dB)	°	±22
Wind load 120Km/h 729N/m <sup>2</sup>	Kg (N)	5.7 (55.9)
Connector		F
Impedence	Ohm	75
Max mast diameter	mm	60
Dimensions	cm	81 x 50
Accessories		
Horizontal polarization		Included